

LUMISERVE


LED PANEL LIGHTS

www.lumiserve.in

A. Recess and Surface mounted Round shape LED Panel Lights :

Technical Specification

Input Voltage : AC 220-240 V, 50/60Hz
 Driver Type : Constant Current. Non-Integral
 P.F >= 0.9
 Surge Protection: 2.5 KV
 CCT Available: 3000K / 4000K / 6500K
 CRI: > 75 Ra
 LED Life: 50,000 Burning Hours
 Optics : Anti-glare Polycarbonate Diffuser
 Accessories : With Driver and Mounting Springs
 Material: Aluminium Body + Polycarbonate Diffuser
 Warranty: 2 years

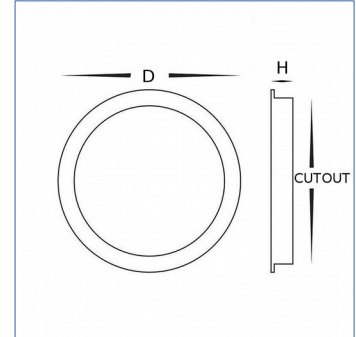


Power	CCT	Lumens*	Cutout Dimensions (mm)	Outer Dimensions (Diameter x Height)(mm)	Product Code
3W	3000K/4000K/6500K	300 lm	Ø75	85 X 14	LS-PL-3W-R
6W		600 lm	Ø100	120 X 14	LS-PL-6W-R
9W		900 lm	Ø100	120 X 14	LS-PL-9W-R
12W		1200 lm	Ø150	165 X 14	LS-PL-12W-R
15W		1500 lm	Ø150	165 X 14	LS-PL-15W-R
18W		1800 lm	Ø200	225 X 14	LS-PL-18W-R
24W		2400 lm	Ø275	300 X 14	LS-PL-24W-R

B. Recess and Surface mounted Square shape LED Panel Lights :

Technical Specification

Input Voltage : AC 220-240 V, 50/60Hz
 Driver Type : Constant Current. Non-Integral
 P.F >= 0.9
 Surge Protection: 2.5 KV
 CCT Available: 3000K / 4000K / 6500K
 CRI: > 75 Ra
 LED Life: 50,000 Burning Hours
 Optics : Anti-glare Polycarbonate Diffuser
 Accessories : With Driver and Mounting Springs
 Material: Aluminium Body + Polycarbonate Diffuser
 Warranty: 2 years

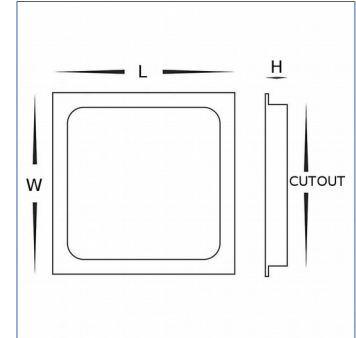

Power	CCT	Lumens*	Cutout Dimensions (mm)	Outer Dimensions (Length x Width x Height)(mm)	Product Code
3W	3000K/4000K/6500K	300 lm	70 X 70	85 X 85 X 14	LS-PL-3W-S
6W		600 lm	100 X 100	120 X 120 X 14	LS-PL-6W-S
9W		900 lm	100 X 100	120 X 120 X 14	LS-PL-9W-S
12W		1200 lm	150 X 150	165 X 165 X 14	LS-PL-12W-S
15W		1500 lm	150 X 150	165 X 165 X 14	LS-PL-15W-S
18W		1800 lm	200 X 200	225 X 225 X 14	LS-PL-18W-S
24W		2400 lm	275 X 275	300 X 300 X 14	LS-PL-24W-S

* Note: Due to constant improvement in technology, the above specifications may be subject to change without prior notice.